

HUBLIT



HOW TO ORDER

HUB -	PORTE	- 100W	V - 6050K	
Input Power		1	Colour Temperature (CCT)	2
50W :	50W		2732K: 2700K - 3200K	
60W :	60W		4050K : 4000K - 5000K	
100W :	100W		6050K: 6000K - 6500K	
120W :	120W			
150W :	150W			
180W :	180W			

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value.Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - PORTE - 100W - 6050K

Porte LED High Bay Lights


General Specifications	
Mounting Type	Surface
Limited Warranty	2 Years
Lighting Source Type	COB LED
Fixture Specifications	
Housing Material	Die Cast Aluminium
Diffuser Material	Polycarbonate
Surface Finish	Powder Coated
Housing Colour	Black
Driver Type	Integrated
Performance Specifications	
Colour rendering index (CRI)	70+
Start up time	Instant
Efficacy (Lm / W)	90+
Electrical Specifications	
Input Voltage (VAC)	90 - 300 VAC
Input Voltage (VAC) Total Harmonic Distorsion	90 - 300 VAC Upto 10%
Total Harmonic Distorsion	Upto 10%
Total Harmonic Distorsion Input Frequency	Upto 10% 50 to 60 Hz
Total Harmonic Distorsion Input Frequency Power Factor	Upto 10% 50 to 60 Hz 0.95 +
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency	Upto 10% 50 to 60 Hz 0.95 +
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency Safety Features	Upto 10% 50 to 60 Hz 0.95 + Upto 80%
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency Safety Features Ingress Protection	Upto 10% 50 to 60 Hz 0.95 + Upto 80%
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency Safety Features Ingress Protection Surge Protection	Upto 10% 50 to 60 Hz 0.95 + Upto 80% IP65 Upto 2KV
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency Safety Features Ingress Protection Surge Protection Short Circuit Protection	Upto 10% 50 to 60 Hz 0.95 + Upto 80% IP65 Upto 2KV Yes
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency Safety Features Ingress Protection Surge Protection Short Circuit Protection Open Circuit Protection	Upto 10% 50 to 60 Hz 0.95 + Upto 80% IP65 Upto 2KV Yes Yes
Total Harmonic Distorsion Input Frequency Power Factor Driver Efficiency Safety Features Ingress Protection Surge Protection Short Circuit Protection Open Circuit Protection Over Voltage Protection	Upto 10% 50 to 60 Hz 0.95 + Upto 80% IP65 Upto 2KV Yes Yes



HUBLIT



HOW TO ORDER

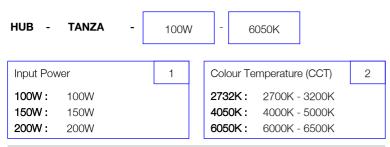

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value.Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - TANZA - 100W - 6050K

Tanza LED High Bay Lights

General Specifications

	100 D
Beam Angle	120 Degrees
Fixture Specifications	
Diffuser Material	Polycarbonate
Surface Finish	Powder Coated
Housing Colour	Black
Driver Type	Integrated
Performance Specifications	
Rated LED Burning Hours	50,000 Hrs
Electrical Specifications	
Input Frequency	50 Hz
Safety Features	
Ingress Protection	IP65
Short Circuit Protection	Yes
Impact Protection	IK07
Open Circuit Protection	Yes
Over Voltage Protection	Yes
Packaging Specifications	
Luminaries Per Box	1
Environmental Specification	
Working Temperature	0 to 40 C
Working Humidity	upto 90%
Vibrations	1G
Smart Features	
Lux Sensing	Optional



HUBLIT



HOW TO ORDER

HUB -	YEADEN	- 160W - 2732K	
Input Power		1 Colour Temperature (CCT)	2
80W : 160W : 320W :	80W 160W 320W	2732K : 2700K - 3200K 4050K : 4000K - 5000K 6050K : 6000K - 6500K	
480W :	480W		

How to order example

To order a Hublit products, you can choose an Input Power from the values above from the minimum value to the maximum value, in this case we use smallest value.Similarly you can choose from the Colour Temperature (CCT) options from 2700K to 6500K and so on to generate the model number; Please find the example of a filled model number for this product.

Example : HUB - YEADEN - 160W - 2732K

Yeaden LED High Bay Lights

General Specifications

General Specifications		
Mounting Type	Surface	
Limited Warranty	5 Years	
Fixture Specifications		
Housing Material	Extruded	
	Aluminium	
Diffuser Material	Polycarbonate	
Surface Finish	Powder Coated	
Housing Colour	Black	
Driver Type	External	
Performance Specifications		
Colour rendering index (CRI)	80+	
Start up time	Instant	
Efficacy (Lm / W)	110+	
Electrical Specifications		
Input Voltage (VAC)	120 - 270 VAC	
Total Harmonic Distorsion	Upto 20%	
Input Frequency	50 to 60 Hz	
Power Factor	0.95 +	
Driver Efficiency	Upto 90%	
Safety Features		
Ingress Protection	IP66	
Surge Protection	Upto 2KV	
Open Circuit Protection	Yes	
Over Voltage Protection	Yes	
Environmental Specification		
Working Temperature	0 to 40 C	
Vibrations	1G	

HUBLIT