

HUBLIT





MINI.12


Catalogue

MINIATURIZATION

Maximum miniaturization of track, luminaires and components.

Minimal Track is as easy to install as a surface system, but it looks like a trimless track due to its small size and its geometric simplicity.

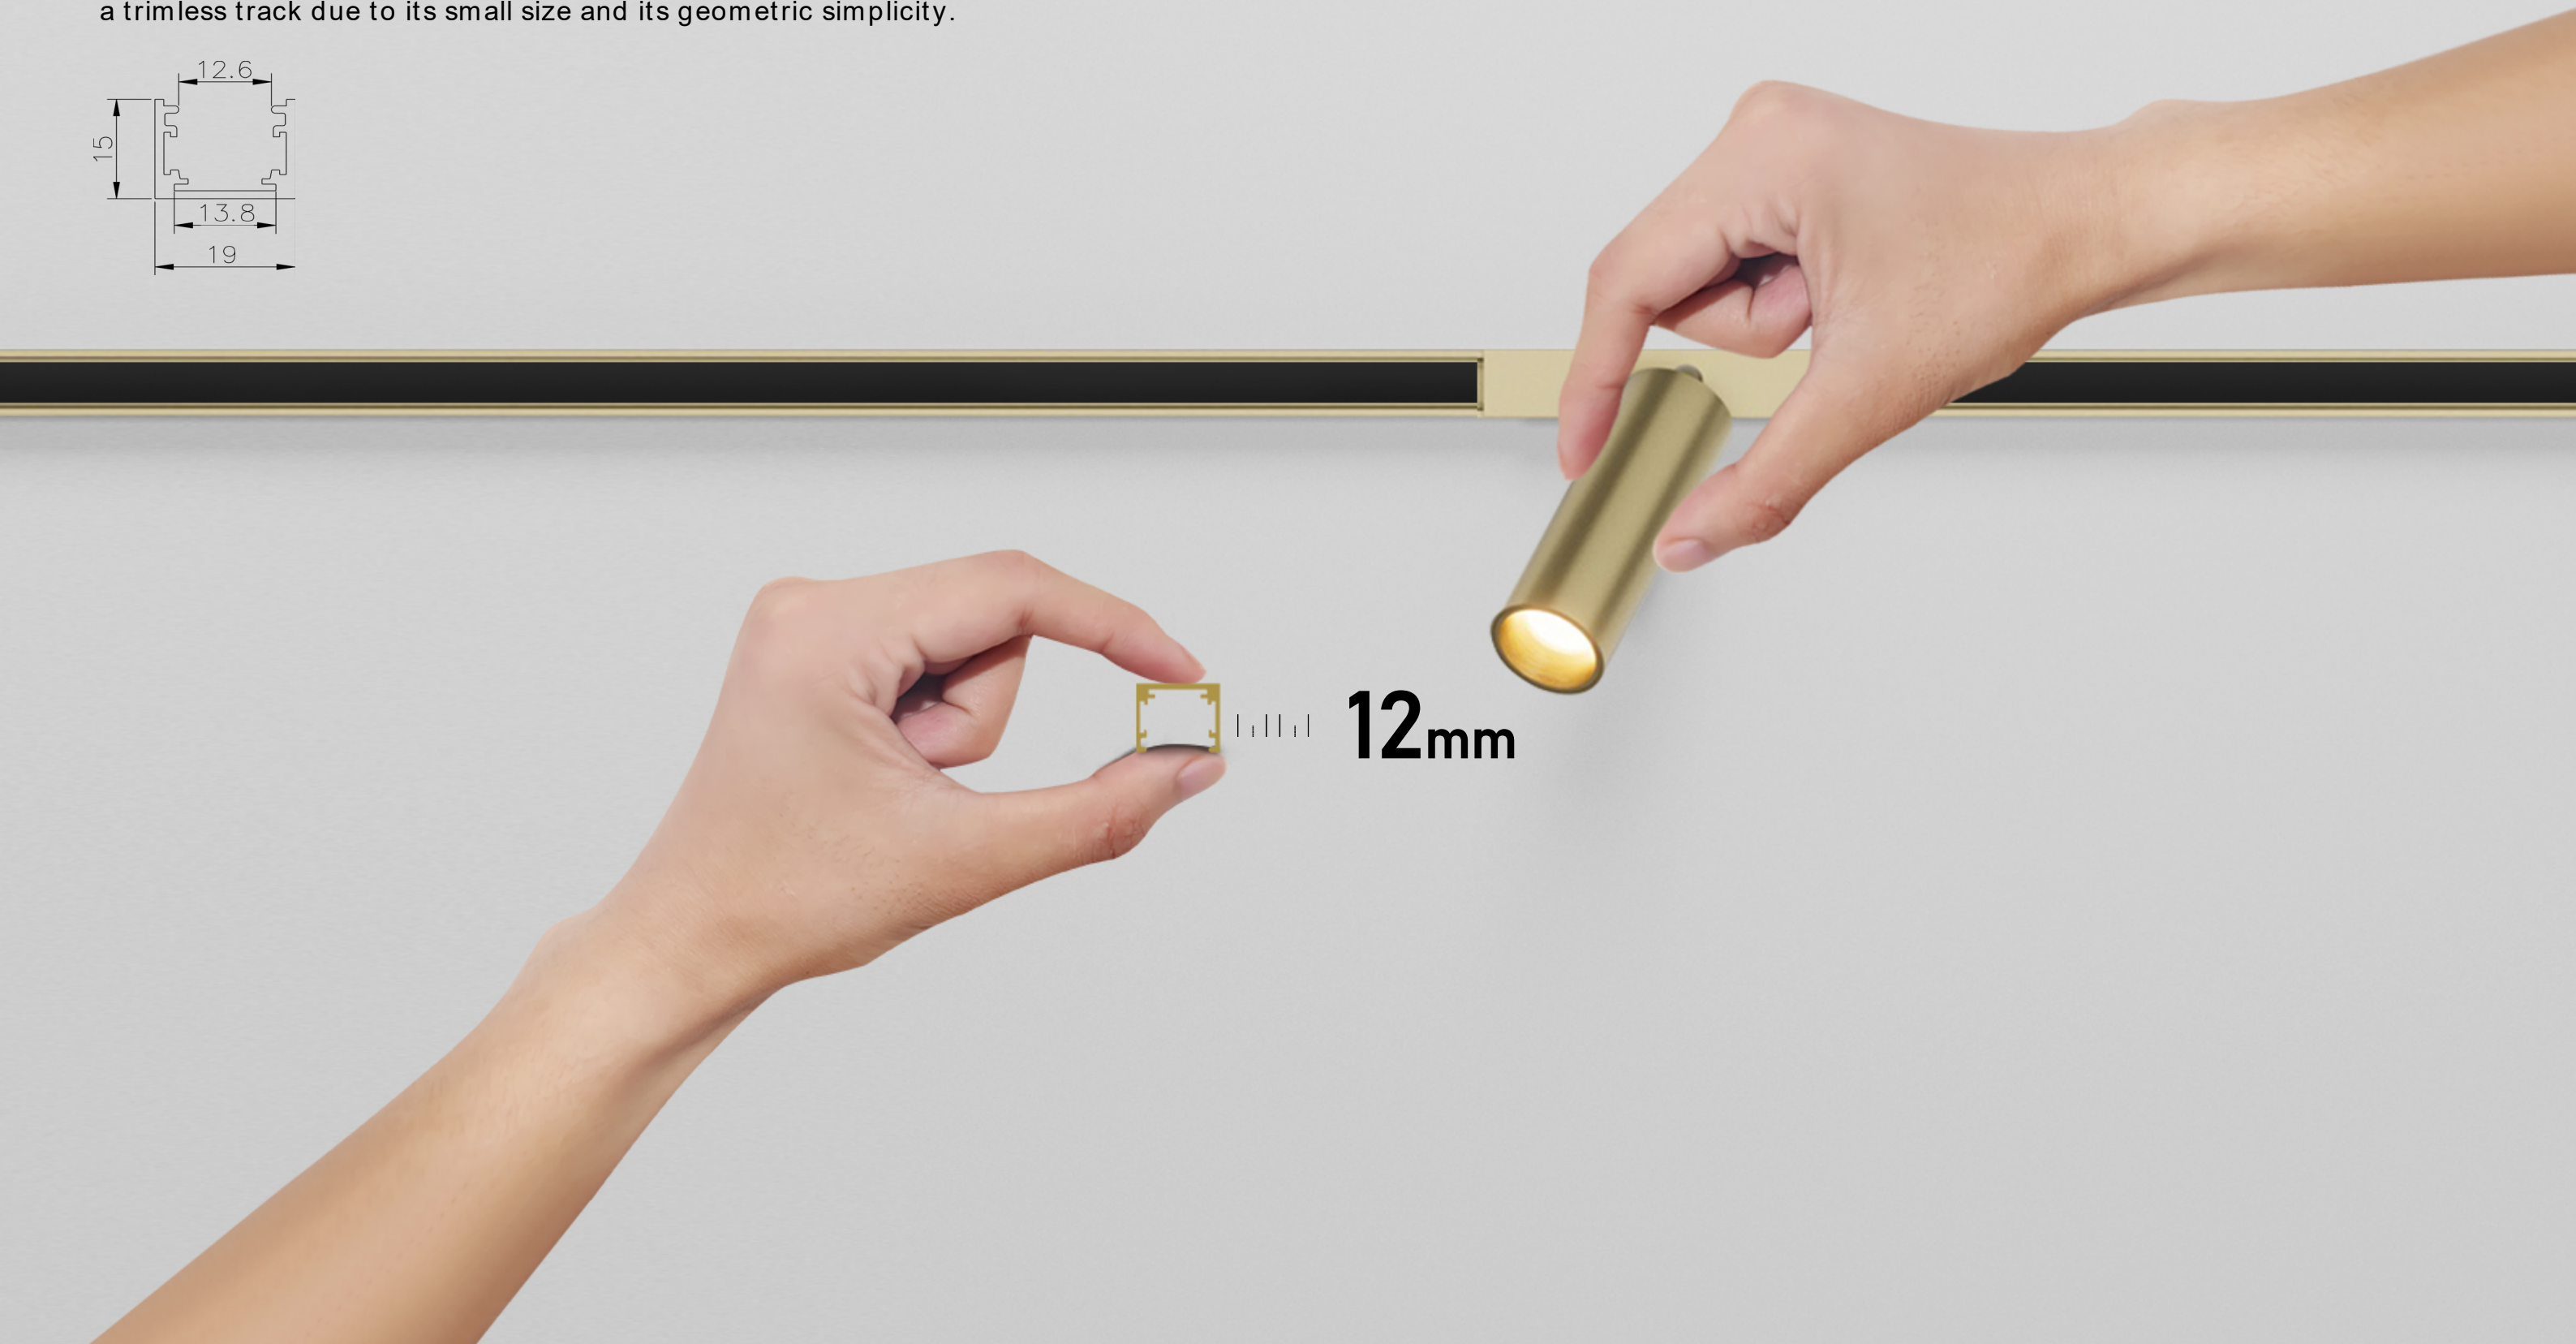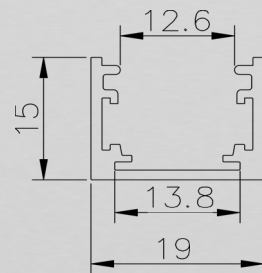

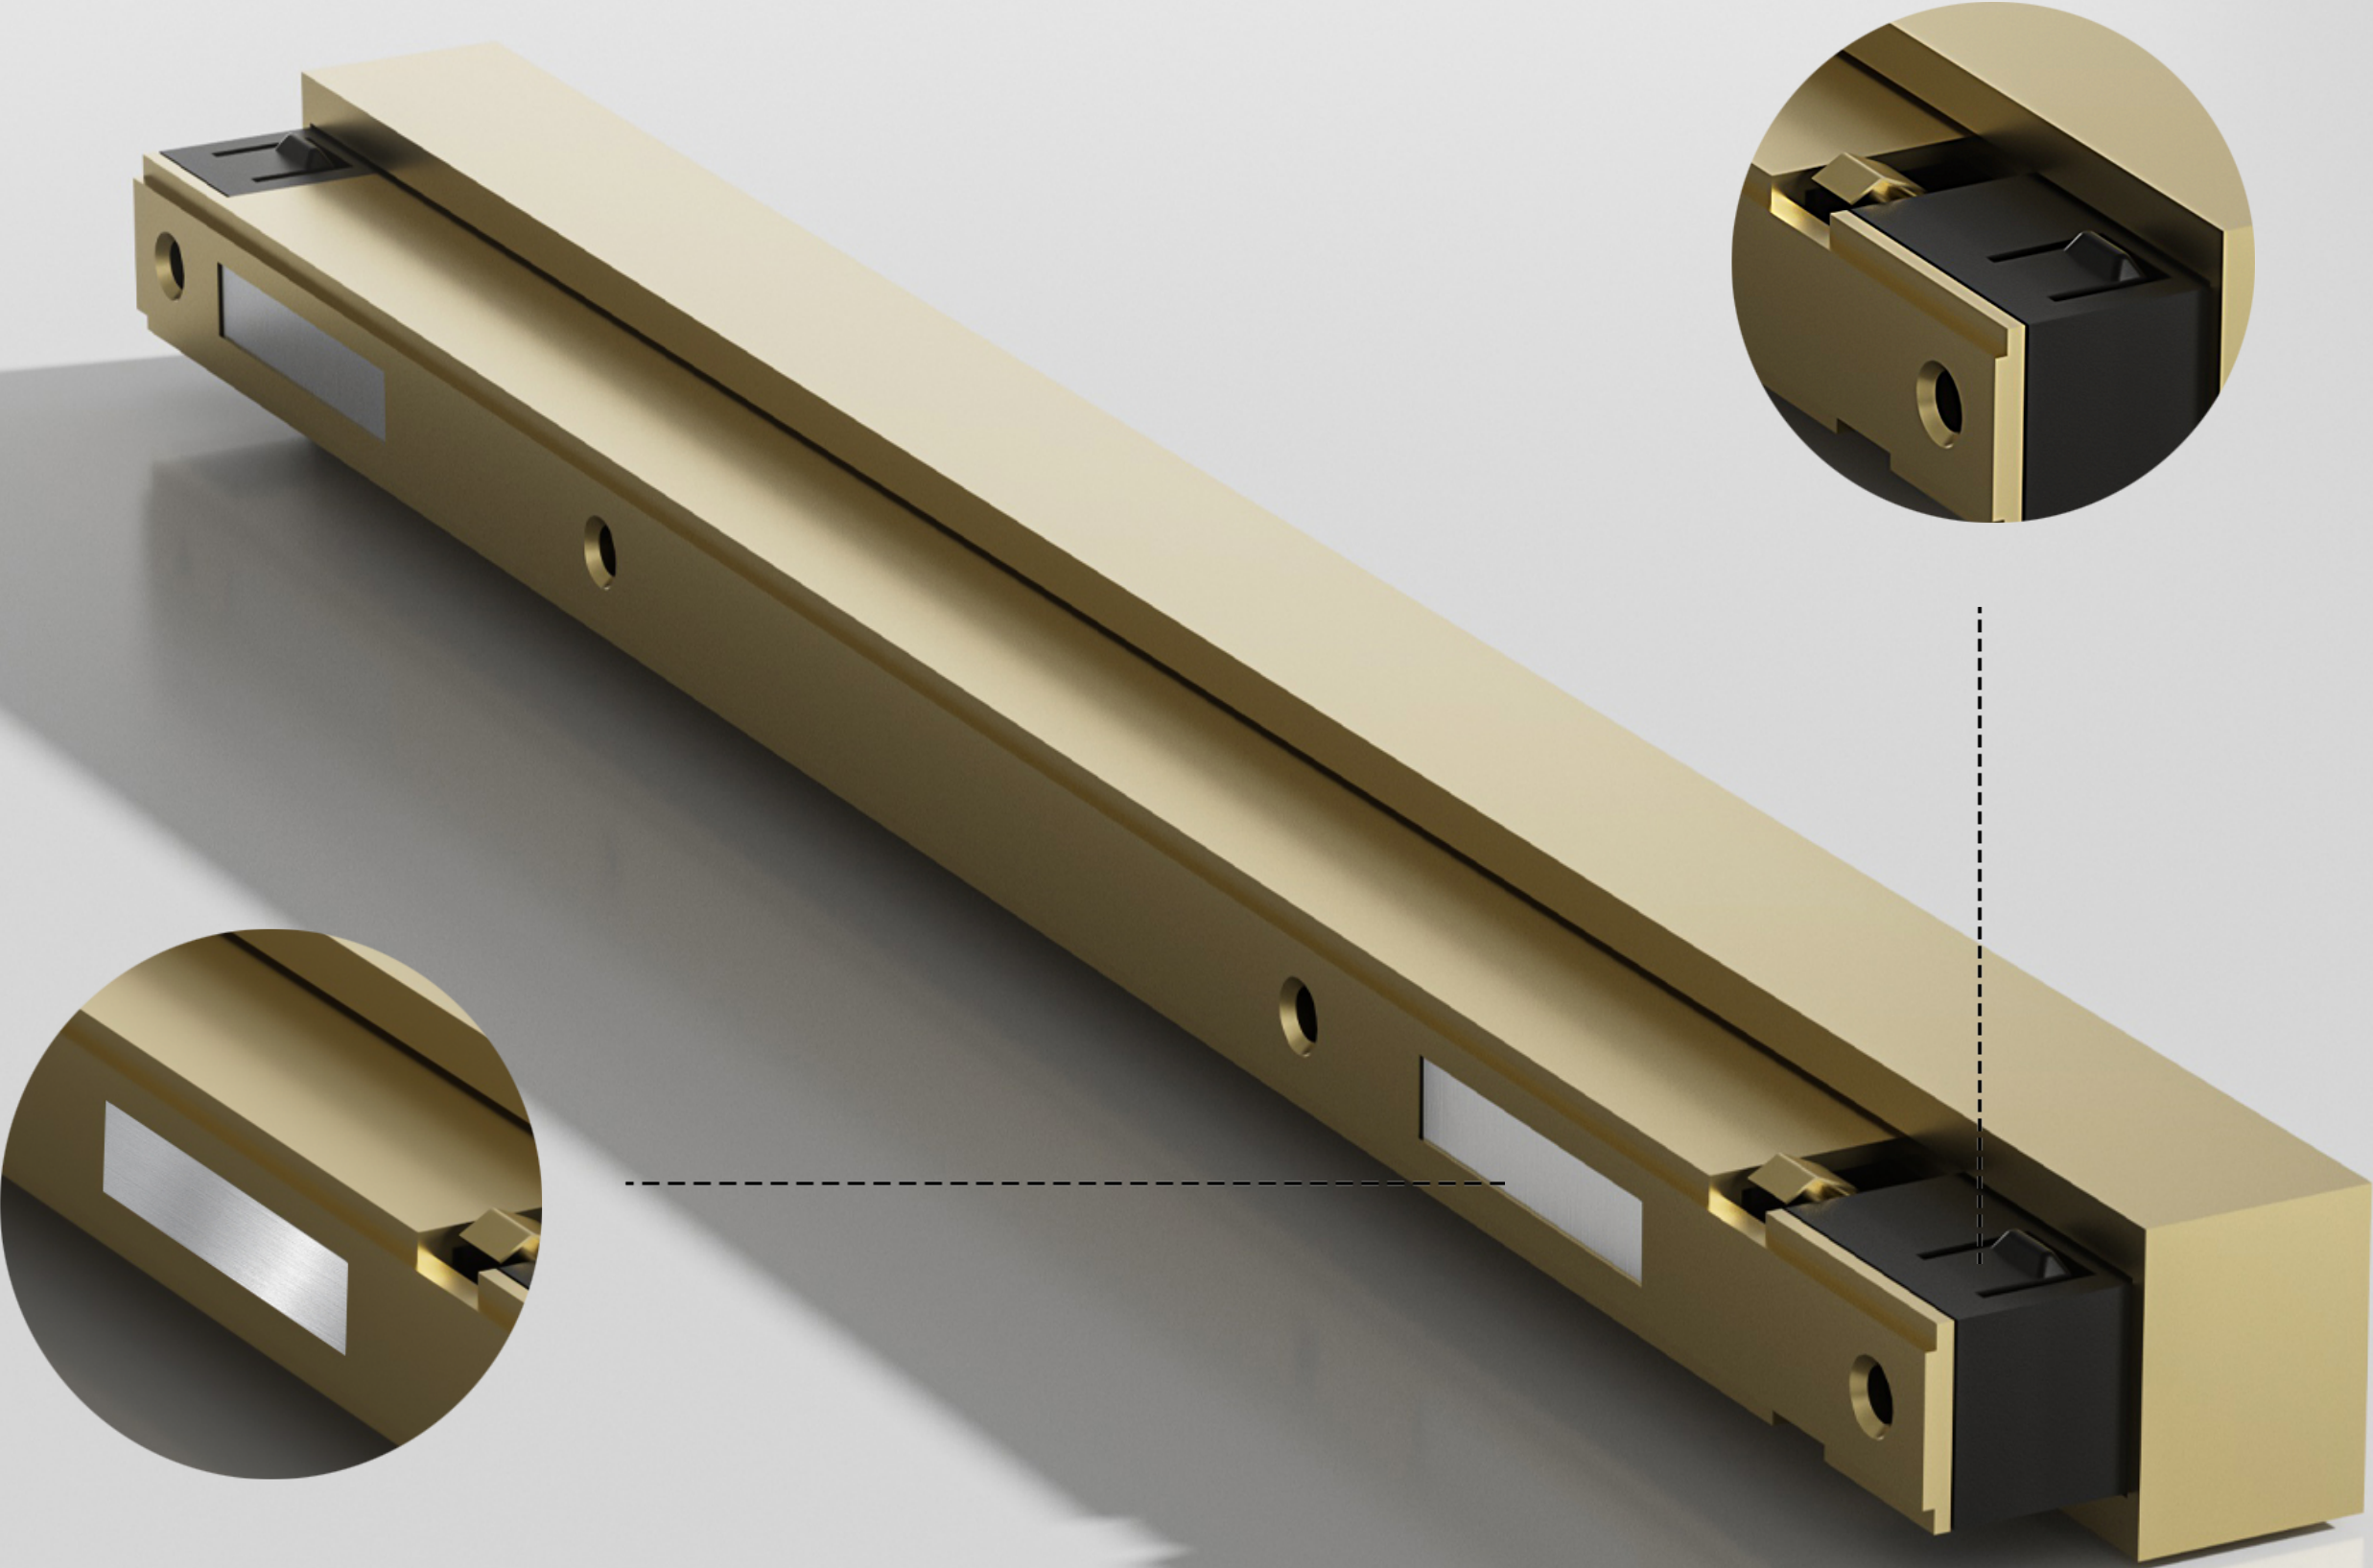


MINIATURIZATION


Secure Lock, Magnetic Grip: Dual Protection

HUBLIT


FLEXIBILITY

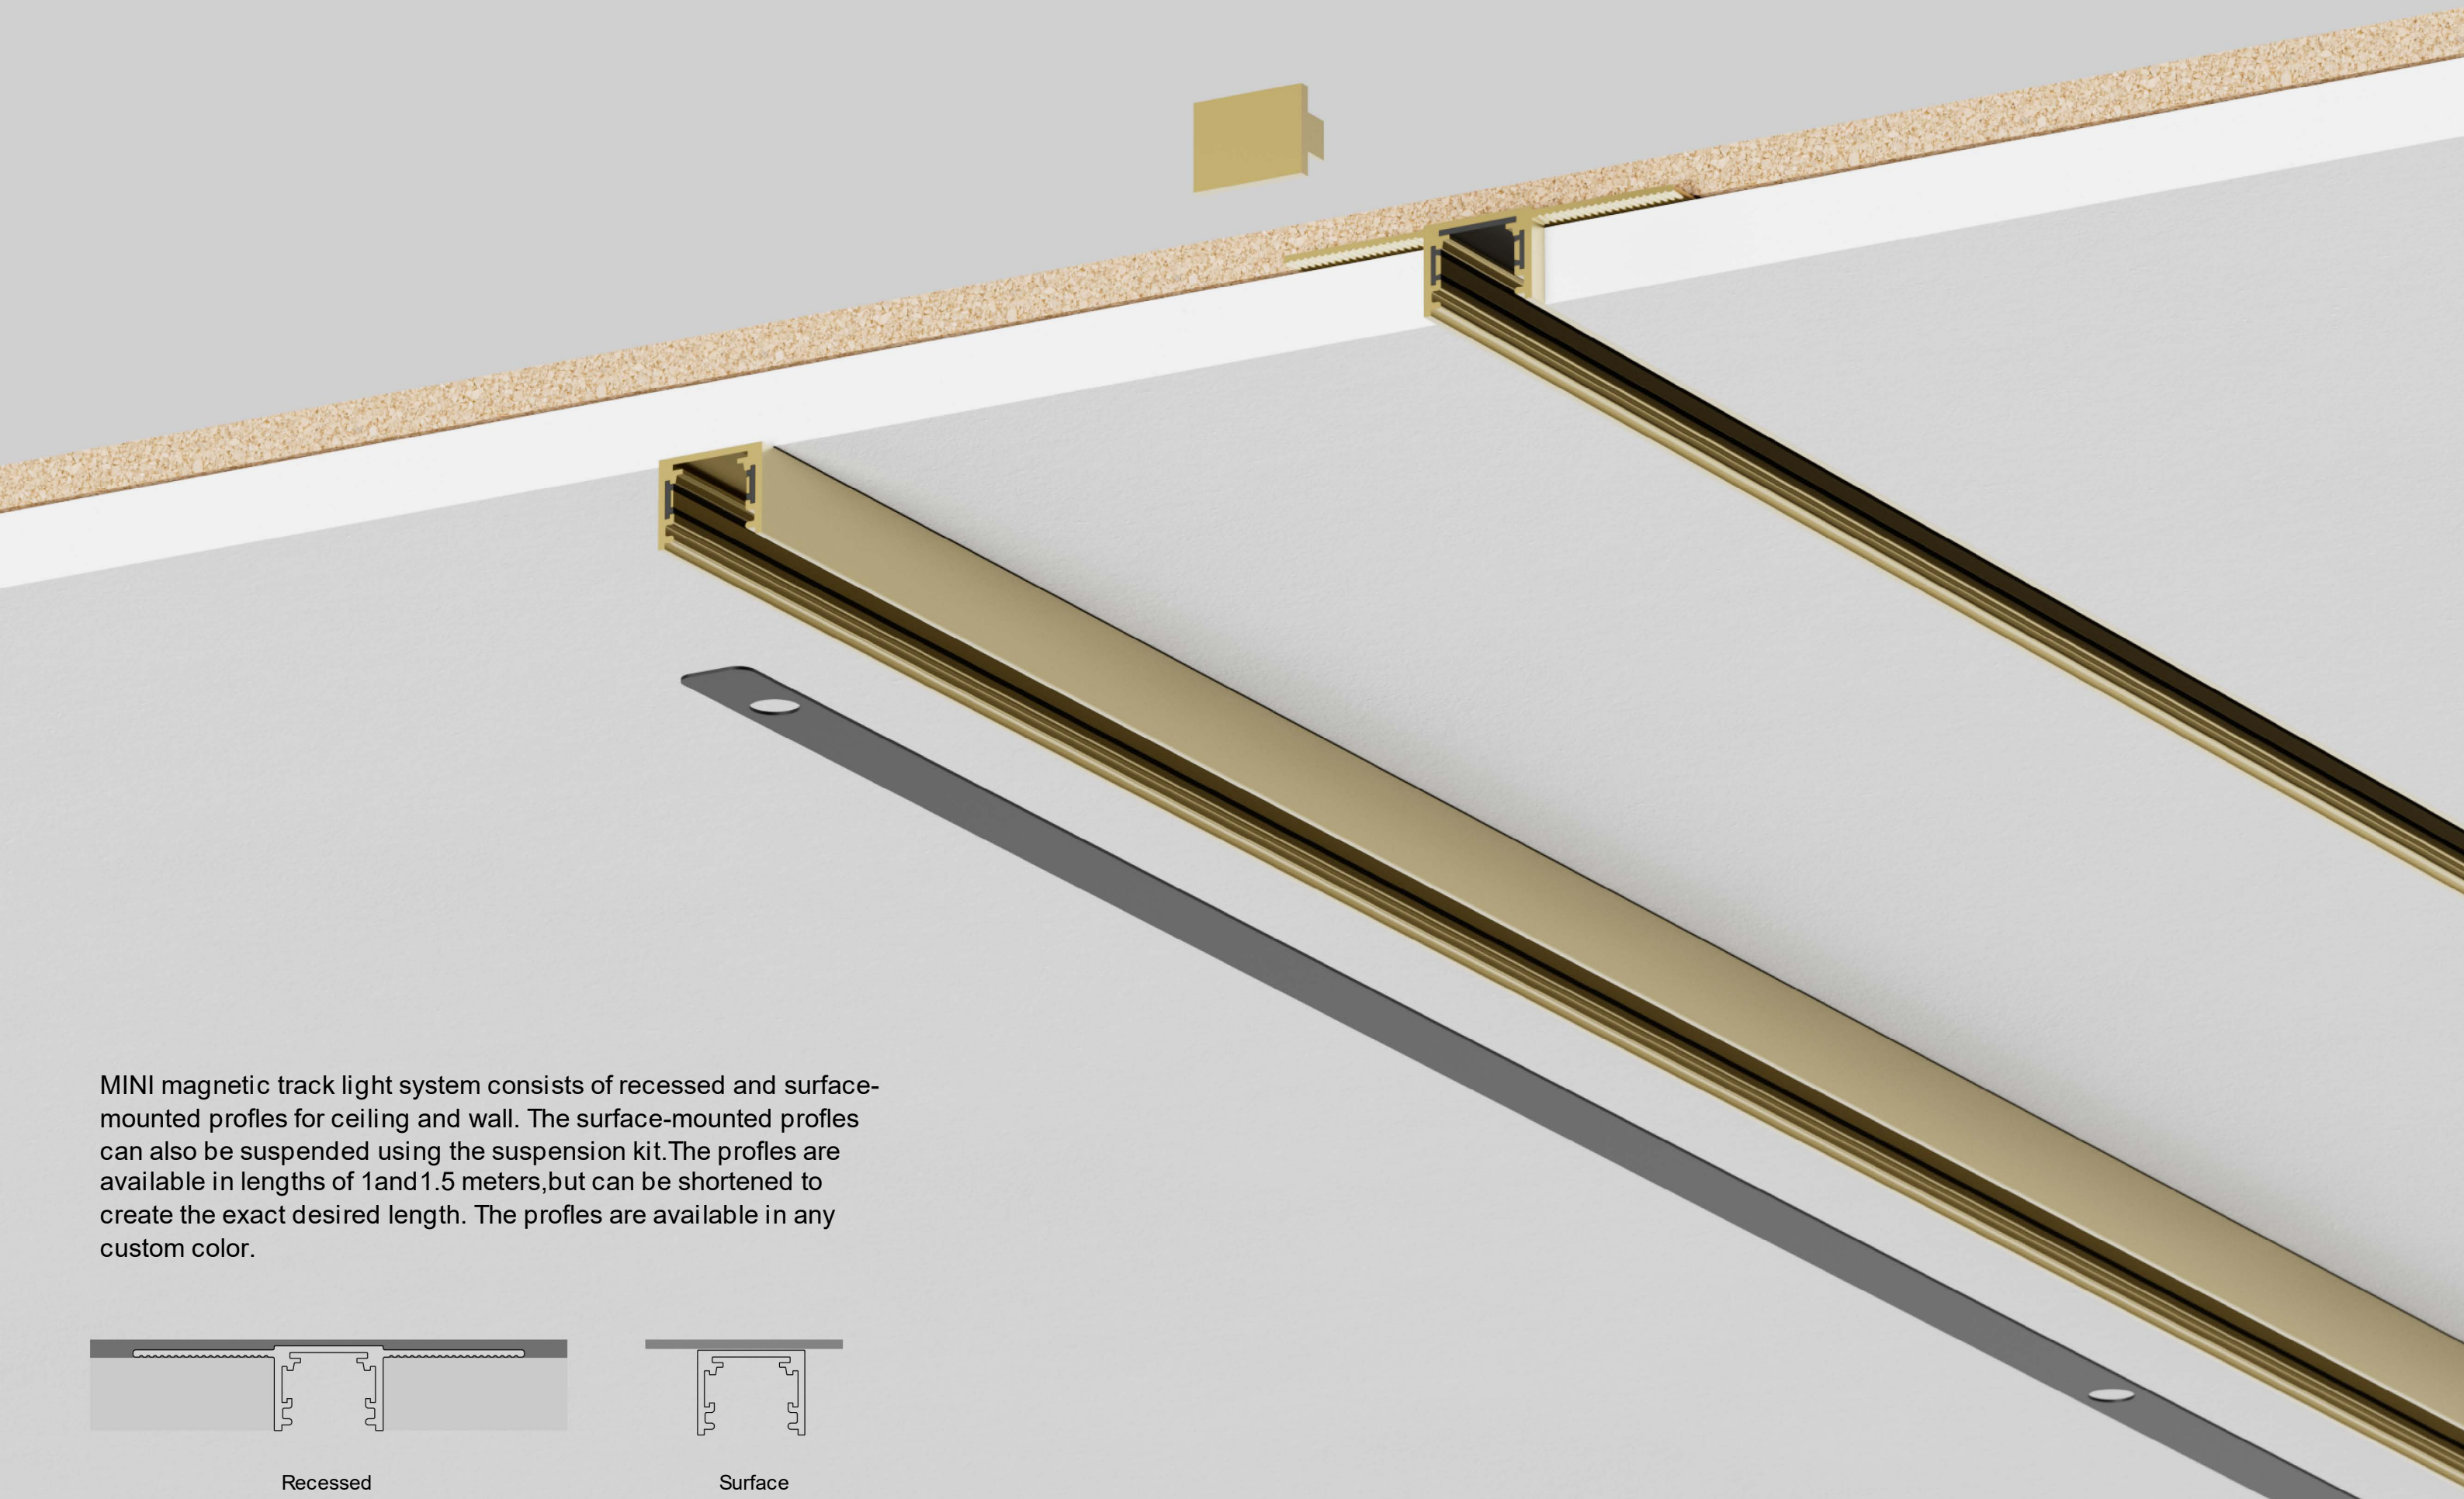

MINI magnetic track light system consists of recessed and surface-mounted profiles for ceiling and wall. The surface-mounted profiles can also be suspended using the suspension kit. The profiles are available in lengths of 1 and 1.5 meters, but can be shortened to create the exact desired length. The profiles are available in any custom color.

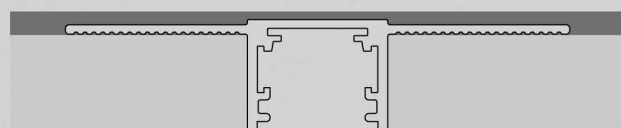

Recessed

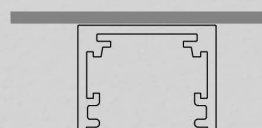

Surface

SUSPENSION



HUBLIT

MINIMAL TRACK



HUBLIT



A VARIETY OF MATCHING OPTIONS

COMPONENTS

1

Power Jointing Connector (On perpendicular planes)



2

Corner 90°(On perpendicular planes)




3

Power Jointing Connector (On same plane)




4

Corner 90°(On same plane)



5


Power Jointing Connector (Straight)






Spot light

HUBLIT

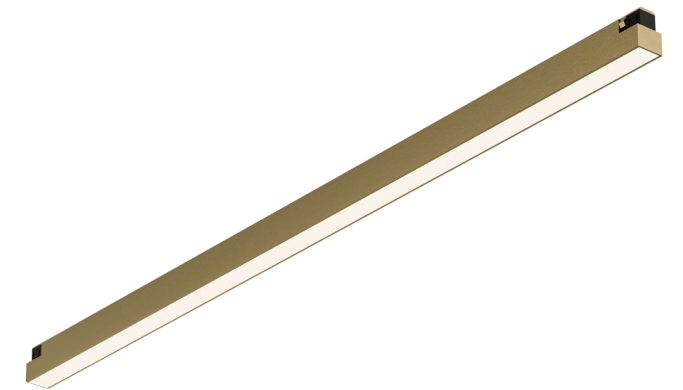


Line floodlight

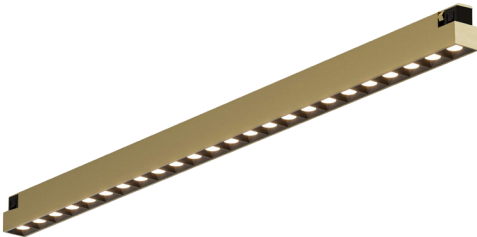


Grid linear lightg



HUBLIT

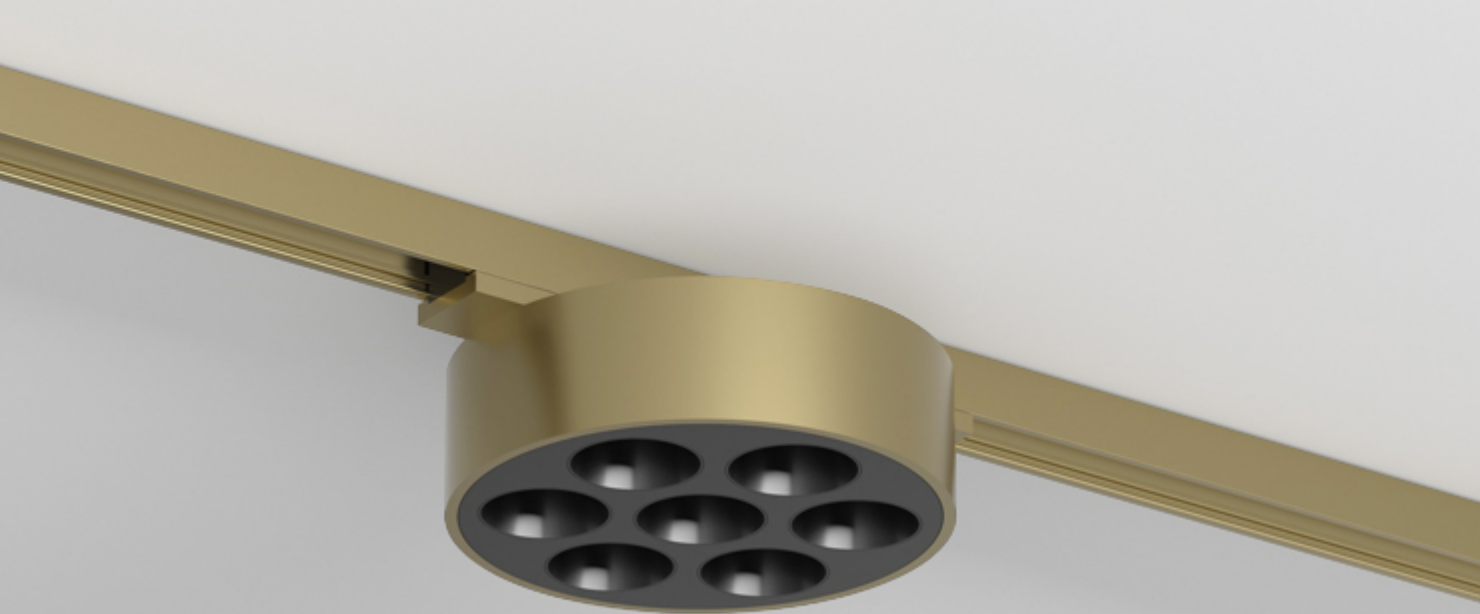

Round grille light

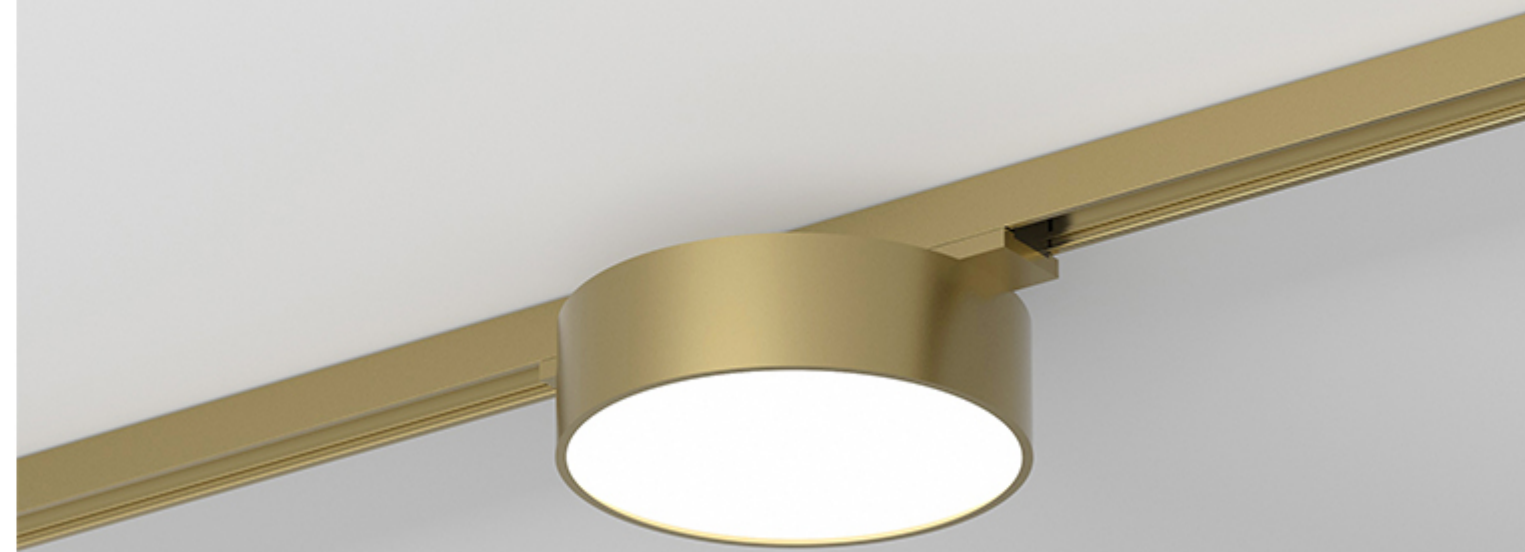

Round flood light



Down light











Circular floodlight



Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
MN12011	D35*H70	6W	3000K	DC 48V	Ledvance COB	>90
MN12012	D35*H100	8W	3000K	DC 48V	Ledvance COB	>90
MN12013	D45*H70	8W	3000K	DC 48V	Ledvance COB	>90
MN12014	D45*H100	10W	3000K	DC 48V	Ledvance COB	>90




Model No.	Product Size (mm)	Power	CCTT	Voltage	Light Source	CRI
MN12021	D35*H70	12W	3000K	DC 48V	Ledvance COB	>90
MN12022	D35*H100	16W	3000K	DC 48V	Ledvance COB	>90
MN12023	D45*H70	16W	3000K	DC 48V	Ledvance COB	>90
MN12024	D45*H100	20W	3000K	DC 48V	Ledvance COB	>90

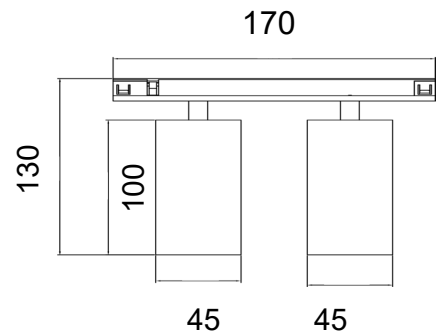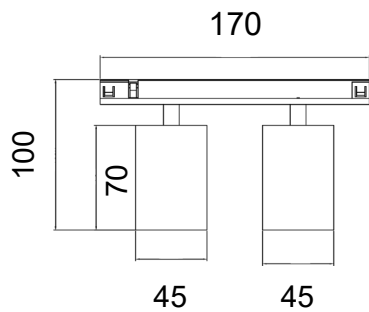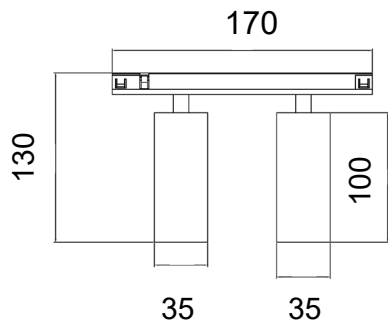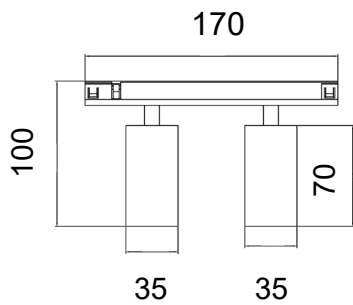
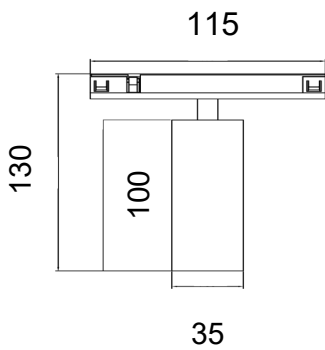
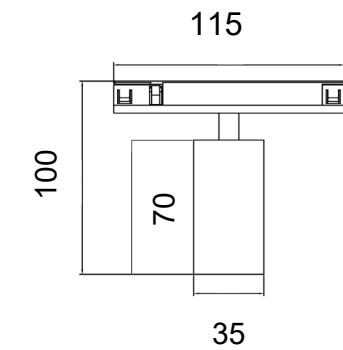




Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
MN12041	L231*W19*H27	10W	3000K	DC 48V	Ledvance SMD	>90
MN12042	L459*W19*H27	20W	3000K	DC 48V	Ledvance SMD	>90






Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
MN12031	L301*W19*H27	12W	3000K	DC 48V	Ledvance SMD	>90
MN12032	L601*W19*H27	24W	3000K	DC 48V	Ledvance SMD	>90

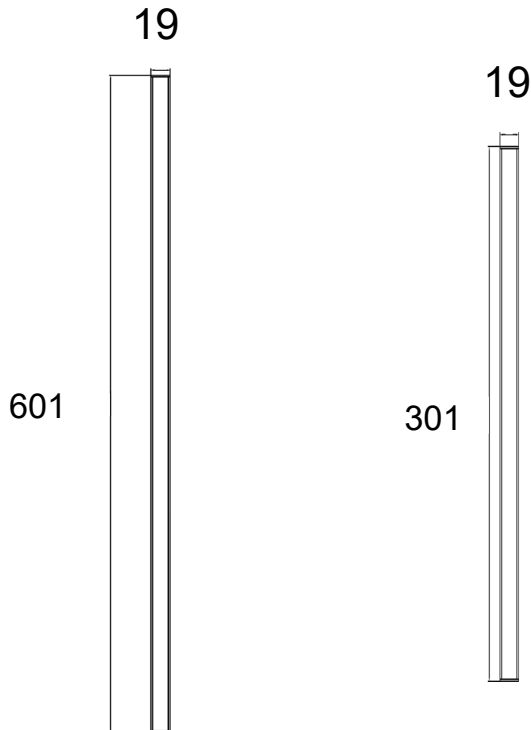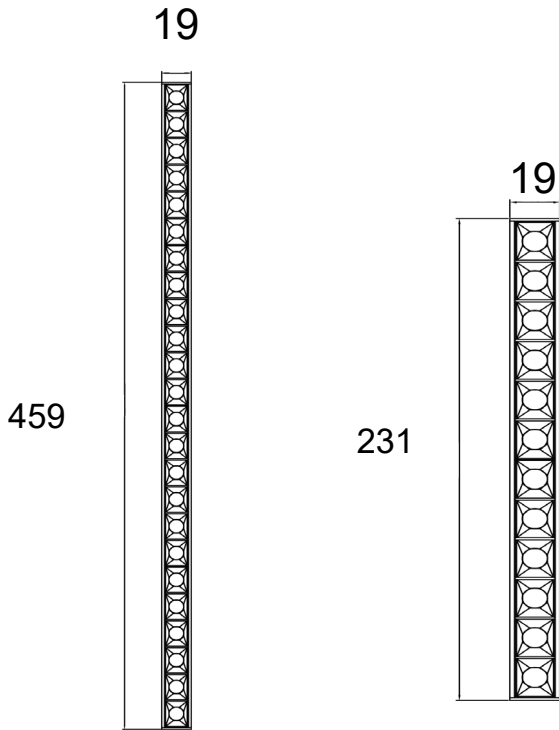





Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
MN12061	D74*H28	6W	3000K	DC 48V	Sanan SMD	>90
MN12062	D95*H28	8W	3000K	DC 48V	Sanan SMD	>90

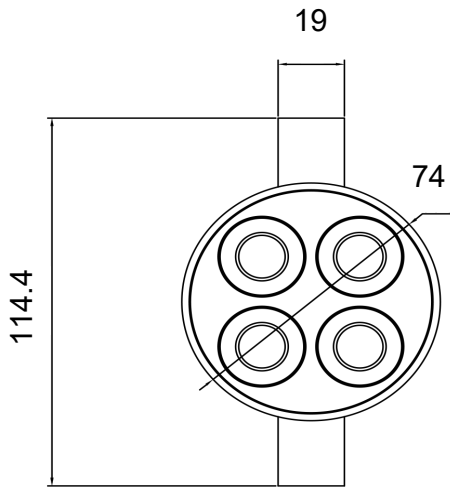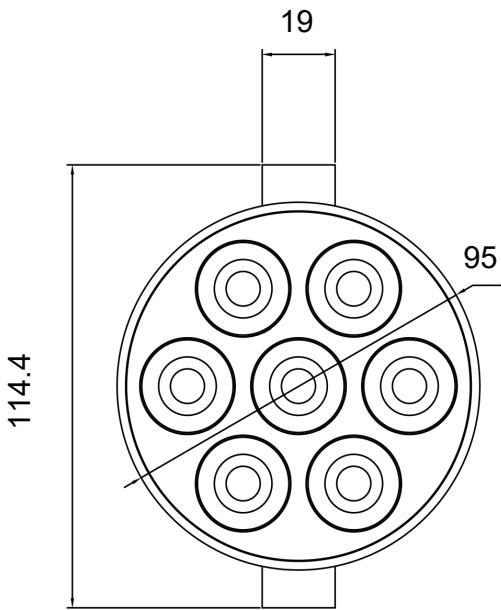

Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
MN12051	D74*H28	6W	3000K	DC 48V	Ledvance SMD	>90
MN12052	D95*H28	8W	3000K	DC 48V	Ledvance SMD	>90

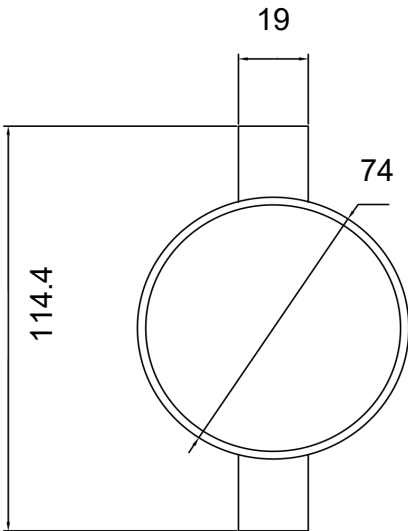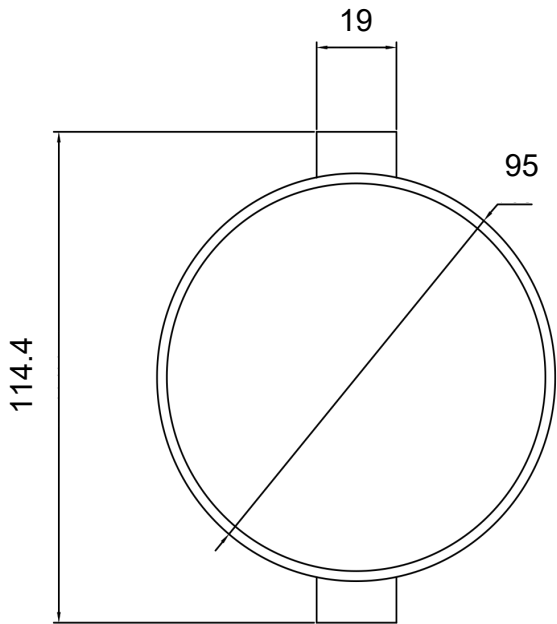



Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
	D70*H60	8W	3000K	DC 48V	Ledvance COB	>90

DC48V INPUT

CE

IP20

MacAdam Step 3

INCL

MINIMAL TRACK

24°



Model No.	Product Size (mm)	Power	CCT	Voltage	Light Source	CRI
	D198*H27	15W	3000K	DC 48V	Sanan SMD	>90

DC48V INPUT

CE



IP20

MacAdam Step 3

INCL

MINIMAL TRACK

120°

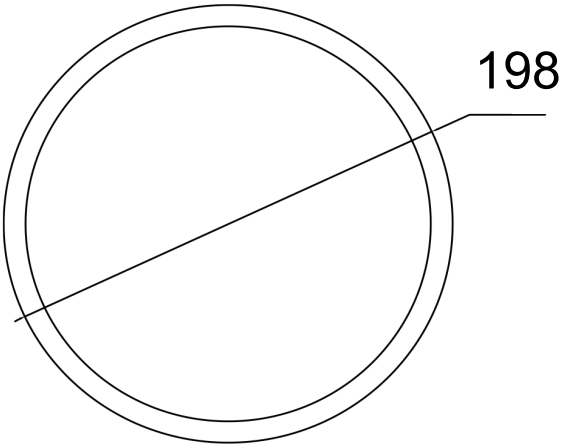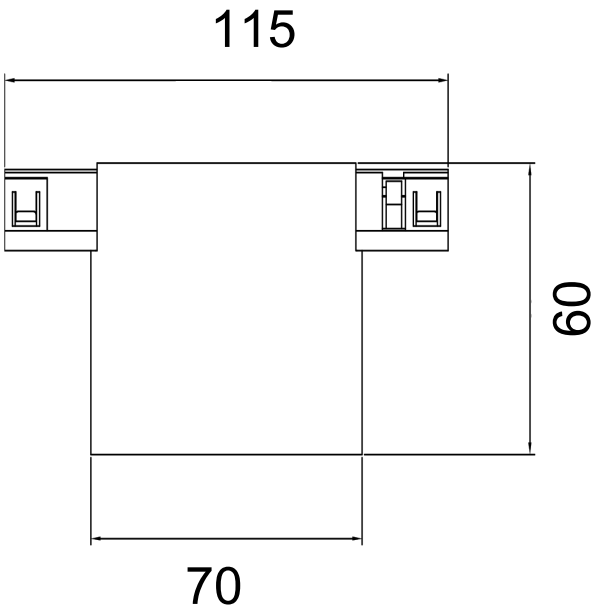

HUBLIT



Color customization